

# BreezeACCESS<sup>®</sup> VL SU-Video

## Wireless Connectivity for Video Surveillance

Alvarion's BreezeACCESS VL SU-Video is a cost-effective, flexible wireless access infrastructure ideally suited for the diverse needs of the video surveillance market. Providing strategic, wire-free outdoor connectivity for a broad range of cameras and sensors, it ensures highly effective video surveillance services in the 5 GHz spectrum.



## Wireless Video Surveillance

Video surveillance is a top priority for government, business and private sectors. A rapidly expanding market, it is generating a growing business challenge to meet demands for safety and security with efficient, easy-to-deploy, cost-effective solutions.

Wireless connectivity offers video surveillance solutions the combination of reduced deployment costs, flexibility in the placement of cameras and optimization of bandwidth allocation. Alvarion's extensive experience in the development and deployment of customized wireless communications systems ensures reliable and resilient mission-critical solutions, specifically designed and optimized for the video surveillance market.

### Ideal Solution for a Range of Video Surveillance Applications

- Government installations
- Urban centers
- Homeland security
- Educational institutions and public buildings
- Transportation centers such as airports, railways, ports and bridges Traffic congestion control
- Personal security services

## Robust Multipoint Solution

The BreezeACCESS VL SU-Video solution consists of two main units:

### BreezeACCESS VL Access Unit (AU)



A base station (AU) supporting two optional configurations:


- Stand-alone micro base station
- Modular shelf base station universal chassis holding up to 6 AU modules

Each configuration includes indoor and outdoor units. The indoor unit connects to the network through a standard Ethernet 10/100BaseT (RJ-45) Interface and to the outdoor unit using a CAT-5 cable.

### BreezeACCESS VL Subscriber Unit (SU)



Enables the seamless connection of single or multiple video cameras to the base station. This platform enables always-on, high-speed, low latency quality of service (QoS), and supports an optimized asymmetric video link of 8 Mbps in the uplink and 2 Mbps in the downlink. The subscriber unit connects to the network via a standard Ethernet 10/100BaseT (RJ-45) interface and connects to its outdoor part via CAT-5 cable.

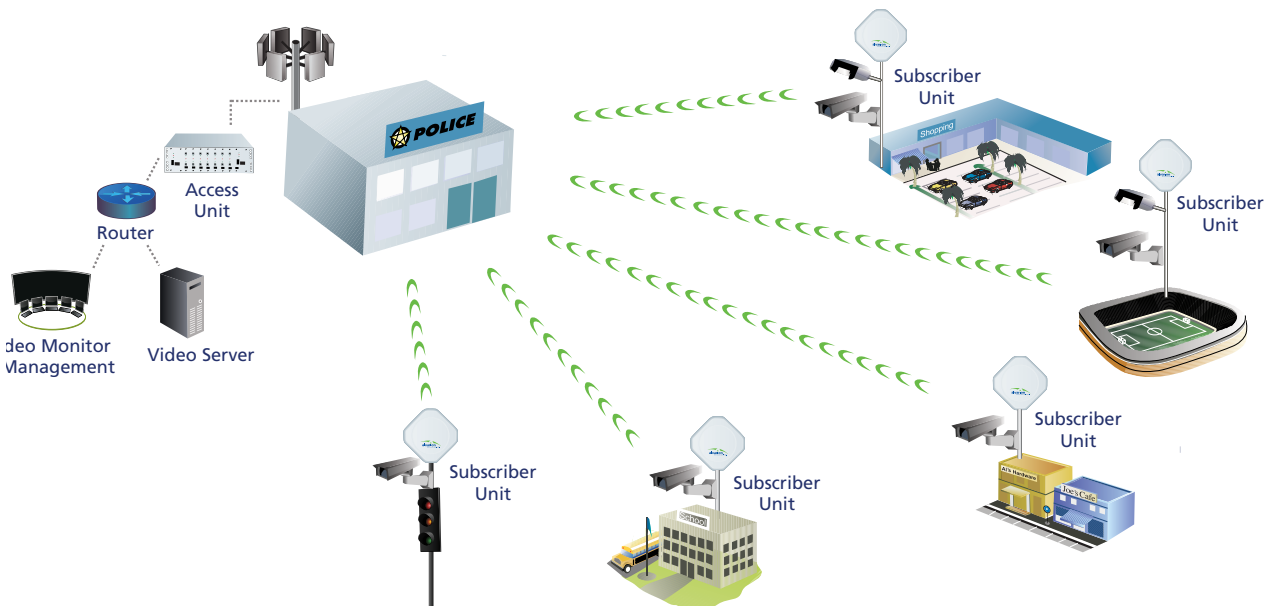

## System Highlights

- Premium 5 GHz PtMP solution
- Optimized bandwidth for video surveillance
- QoS for video and voice applications using WLP
- Secure connectivity (FIPS 197 certified)\*
- Carrier-class outdoor link reliability and availability
- Ultimate versatility and robustness
- TDD OFDM technology, supporting NLOS deployments
- Coverage range of up to 30 km
- Capacity of up to 32 Mbps per sector
- Configurable MIR/CIR per CPE per direction
- Scalable pay-as-you-grow configurations

\* Certification in future release



## System Advantages

<b>Quality Connectivity</b>	Optimized asymmetric bandwidth allocation dedicated to video streaming needs and providing cost-effective quality connectivity.
<b>Flexibility</b>	Cameras can be located exactly where required and transferred when necessary, since the system is free of wired infrastructure restraints and ensures full tactical communications in every possible configuration.  Using adaptive modulation the link can be optimized to any new deployment location.
<b>Quick Integration</b>	Standard-based solution which secures infrastructure investments and is operational with all surveillance cameras and applications.  Quick installation using the LED bar to maximize the CPE signal.
<b>Compelling Business Case</b>	Requires less base stations and eliminates complex cabling and related mounting fixtures, reducing installation and on-going maintenance costs.
<b>Maximizes Modularity</b>	NLOS support, high bandwidth capacity, increased coverage, multi-subscriber profiles in same sector and network.
<b>Powerful Access</b>	Proven robust system enabling best of class service delivery, including long range and high capacity service. Dynamic frequency selection (DFS), with unique Alvarion algorithm improves channel management in low radar activity conditions.  The Access Unit automatically selects algorithm for best possible service, rapid antenna alignment and SLA enforcement.
<b>Security</b>	Built-in encryption and a host of secure management and authentication functions.
<b>Reliable</b>	Ruggedized solution operating over an extended temperature range.

## Headquarters

International Corporate Headquarters  
Tel: +972.3.645.6262  
Email: corporate-sales@alvarion.com

North America Headquarters  
Tel: +1.650.314.2500  
Email: n.america-sales@alvarion.com

## Sales Contacts

Australia  
Email: anz-sales@alvarion.com

Brazil  
Email: brazil-sales@alvarion.com

Canada  
Email: canada-sales@alvarion.com

Caribbean  
Email: caribbean-sales@alvarion.com

China  
Email: cn-sales@alvarion.com

Czech Republic  
Email: czech-sales@alvarion.com

France  
Email: france-sales@alvarion.com

Germany  
Email: germany-sales@alvarion.com

Italy  
Email: italy-sales@alvarion.com

Ireland  
Email: uk-sales@alvarion.com

Japan  
Email: jp-sales@alvarion.com

Latin America  
Email: lasales@alvarion.com

Mexico  
Email: mexico-sales@alvarion.com

Nigeria  
Email: nigeria-sales@alvarion.com

Philippines  
Email: ph-sales@alvarion.com

Poland  
Email: poland-sales@alvarion.com

Portugal  
Email: sales-portugal@alvarion.com

Romania  
Email: romania-sales@alvarion.com

Russia  
Email: info@alvarion.ru

Singapore  
Email: asean-sales@alvarion.com

South Africa  
Email: africa-sales@alvarion.com

Spain  
Email: spain-sales@alvarion.com

U.K.  
Email: uk-sales@alvarion.com

Uruguay  
Email: uruguay-sales@alvarion.com

For the latest contact information in your area, please visit:  
[www.alvarion.com/company/locations](http://www.alvarion.com/company/locations)



[www.alvarion.com](http://www.alvarion.com)

© Copyright 2008 Alvarion Ltd. All rights reserved. Alvarion® and all names, product and service names referenced herein are either registered trademarks, trademarks, tradenames or service marks of Alvarion Ltd. All other names are or may be the trademarks of their respective owners. The content herein is subject to change without further notice.

214949 rev.d

## Specifications

### Radio

**Frequency**  
5.47 - 5.725 GHz, 5.725 - 5.850 GHz

**Radio access method**  
Time Division Duplex TDD

**Channel**  
10 MHz, 20 MHz (auto)

**Central frequency resolution**  
5 MHz, 10 MHz

**Capacity**  
AU Capacity: 32 net FTP/ 54 gross  
SU Capacity: 8 Mbps uplink, 2 Mbps downlink

**Max input power (at ant. port)**  
-48 dBm Typical

**Max output power (at antenna port)**  
AU: -10 dBm to 21 dBm, 1 dB steps  
SU: -10 dBm to 21 dBm, automatically adjusted by ATPC (actual max power may be limited for compliance with local regulation)

**Modulation scheme (adaptive)**  
OFDM: BPSK, QPSK, QAM 16, QAM 64

**Antenna port (AU-RE)**  
N-Type 50 ohm

**Subscriber integrated antenna**  
21 dBi (19 dBi in 4.9-5.1 GHz band), 10.5° H/V, Integrated flat panel

**AU antennas**  
60°: 16 dBi, Sector 60° horizontal, 10° vertical  
90°: 16 dBi, Sector 90° horizontal, 6° vertical  
120°: 15 dBi, Sector 120° horizontal, 6° vertical  
360°: 8 dBi, Sector 360° horizontal, 9° vertical (AU-SA only)

### Sensitivity, typical (dBm at antenna port, @10-6)

Modulation	1	2	3	4	5	6	7	8
Level* (20 MHz)	-89	-88	-86	-84	-81	-77	-73	-71
Level* (10 MHz)	-92	-91	-89	-87	-84	-80	-76	-74

\* Modulation Level combines modulation scheme and coding gain.

### Data Communications

**VLAN support**  
Based on IEEE 802.1q, QinQ 802.1ad

**Layer-2 traffic prioritization**  
Based on IEEE 802.1p

**Layer-3 traffic prioritization**  
IP ToS according to RFC791 and DSCP according to RFC2474

**Layer-4 traffic prioritization**  
UDP/TCP port range

**Security**  
WEP 128-bit authentication, AES 128, WEP 128, and certified FIPS-197 mode built in encryption

### Configuration and Management

**Local and remote management**  
Monitor via Telnet, SNMP and configuration upload/download

**Remote management access**  
From wired LAN, wireless link

**Management access protection**  
Multilevel password  
Configuration of remote direction (from Ethernet only, wireless only, or both sides)  
Configuration of IP addresses of authorized stations

**Software upgrade**  
Via TFTP and FTP

**Configuration up/download**  
Via TFTP and FTP

**SNMP agents**  
SNMP v1 client, MIB II, Bridge MIB, Private BreezeACCESS VL MIB

### Physical and Electrical

Type	Connectors		Outdoor Unit
SU-A, SU-E, AU-SA	Ethernet	10/100BaseT RJ-45, 2 embedded	Power consumption 25 W AC input: 100-240 VAC, 50/60Hz DC option available
	Radio	LEDs	
	AC IN	10/100BaseT Ethernet RJ-45	
PS (IDU)	Indoor	3-pin AC power plug 10/100Base RJ-45 with waterproof	54 VDC from indoor to outdoor
AU-BS	Ethernet	sealing assembly	Power consumption 30 W (module plus outdoor unit) AC input: 100-240 VAC, 50/60 Hz 3.3 VDC, 54V from power supply in backplane
	Radio	10/100BaseT RJ-45, 2 embedded LEDs 10/100BaseT Ethernet RJ-45	
BS-PS-AC-VL (AC power supply)	AC-IN	3-pin power plug	Power consumption: 240 W, full chassis (1 PS, 6 AU) AC input: 85-265 VAC, 47-65 Hz DC output: 54V, 3.3V
BS-PS-DC-VL (DC power supply)	-48 VDC	3-pin DC D-Type 3 power pin plug Amphenol	Power consumption: 240 W, full chassis (1 PS, 6 AU) DC input: -48 VDC nominal (-34 to -72), 10 A max. DC output: 54V, 3.3V

### Standard Compliance

**Type Standard**

**EMC**  
FCC Part 15 class B, CE EN55022 class B

**Safety**  
UL 1950, EN 60950

**Environmental**  
ETS 300 019 part 2-3 class 3.2E for indoor units  
ETS 300 019 part 2-4 class 4.1E for outdoor units

**Storage**  
ETS 300 019-2-1 class 1.2E

**Transportation**  
ETS 300 019-2-2 class 2.3

**Lightning protection**  
EN 61000-4-5, class 3 (2kV)

**Radio**  
FCC part 15, FCC P.90, EN 301 893 (V 1.3.1)

Note: Not all options are available in all regions and some features require software licensing key. Please contact your local representative for further information.